


ECO-TRONIC FB

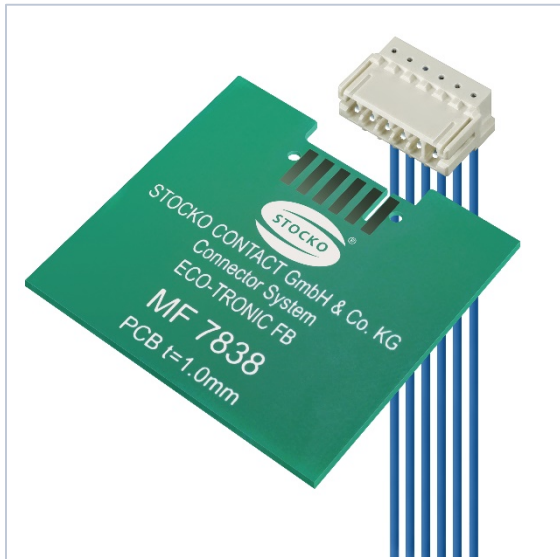

CONNECTOR SYSTEM ECO-TRONIC FB

With **ECO-TRONIC FB** it concerns a connector system which is suitable for classical FR4 PCB with a PCB thickness of 1 mm.


The demands of different areas of application, in particular of the automobile industry, were considered by the constructive design.

By the performance profile this series is suited particularly for uses in the areas of LED lighting and display contacting. For uses like the contacting of sensors and actuators, it is suited too.

The contact design guarantees a stable mechanically and electrically connection between contact and conductor with 0.22 mm² and 0.35 mm².

Displace security by polarisation elements and mechanical barriers against damage of contacts by disoriented mating ensures the quality of the connection in the use and in the application.

In addition an automatic processing of the connector system ensures the high quality standard over the whole manufacturing process.

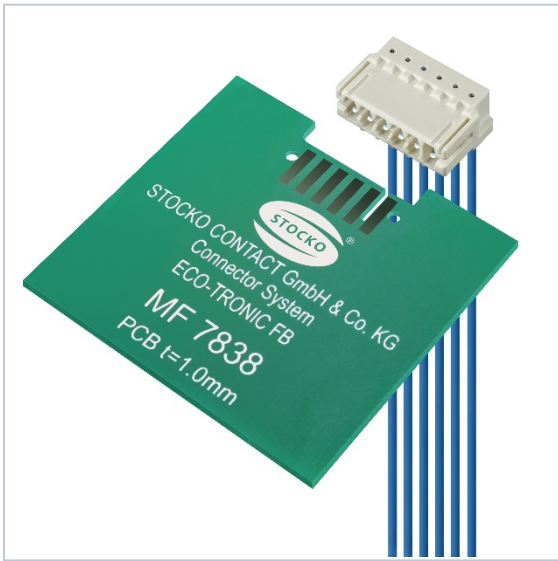

CHARACTERISTICS

General

- Article number MFVV 7838
- Direct connector system
- Pitch 2.50 mm
- Colour of housing nature
- Interface according to Rast 2.5
- Fulfils requirements of automotive
- Polarisation and codings
- Lock between plug and PCB
- The end position of the insertion is tactile
- Duration ambient temperature 120 °C (tin)
- Fulfils the list of illegal basic materials acc. to REACH
- GWT 750 °C acc. to IEC 60335-1


Housing

- Premounted contacts
- Wire outlet 90°
- Wire size 0.22 mm² and 0.35 mm²
- Packaging in magazine
- Termination of wire by automatic machine possible

Contact

- Surface finishing Sn
- IDC-technology

ECO-TRONIC FB

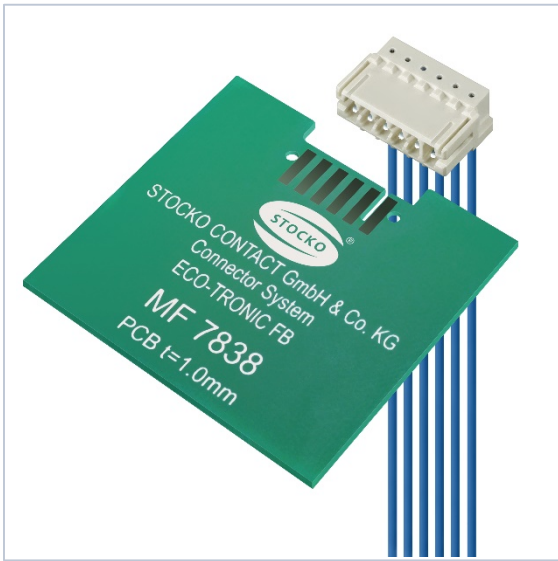


TECHNICAL DATA


Mechanical

Pitch	2.50 mm
Positions	2 – 20
Dimension	see drawing
Contacting of cable	IDC-technology
Board thickness	1.00 ±0.10 mm
Wire size	0.22 mm ² and 0.35 mm ²
Insulation-Ø	≤ 1.4 mm
Hardness of insulation	max. Shore A 90° ±5
Type of wire	solid, stranded
Operating temperature	-40 °C ...+120 °C (tin)
Insert cycles	5
Max. angle of insert	±3°

Electrical

Current rating	4 A (85 °C/0.35 mm ²)
Nominal voltage (IEC 60664/ Grad 2)	32 V (pitch 2.50 mm) 250 V (pitch 5.0 mm)
Dielectrical strength	1.40 kV (pitch 2.50 mm) 2.80 kV (pitch 5.0 mm)
Insulation resistance	> 10 ³ MΩ
Contact resistance	< 10 mΩ
Air gap and creeping distances	> 1 mm (pitch 2.50 mm) > 3 mm (pitch 5.0 mm)
Tracking resistance	CTI ≥ 400

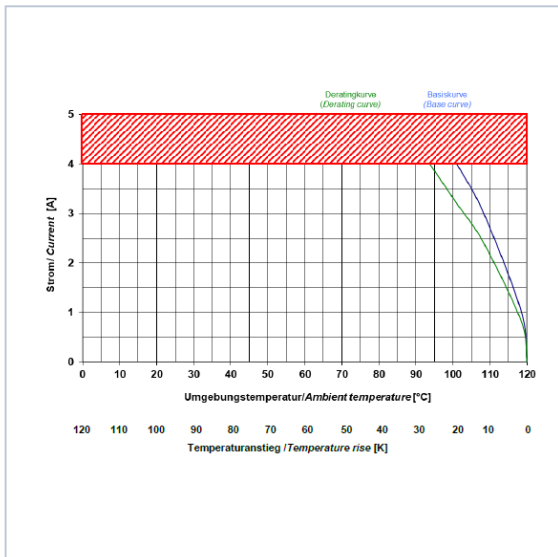

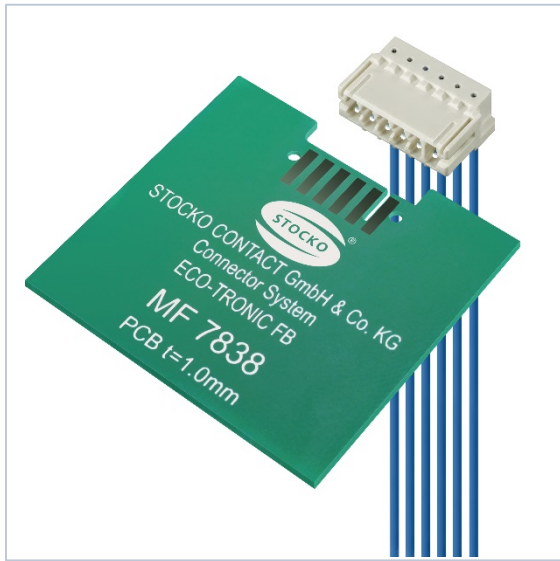

TECHNICAL DATA

Material

Contact	Cu-alloying
Surface finishing of contact	Sn*
Housing	PA nature

Approval

- VDE
- acc. to LV 214
- acc. to USCAR2

* Further surfaces on request



STOCKO CONTACT

GmbH & Co. KG

Simonshöfchen 31
D-42327 Wuppertal

Phone +49 202 9733 - 2
Fax +49 202 9733 - 411

E- Mail info@stocko-contact.com
Internet www.stocko-contact.com

Ein Unternehmen der Wieland Gruppe
A Member of the Wieland Group